LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 125/100/100

LORO-X reduced double branch 45 degrees DN 125/100/100

Leírás

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN125/100/100

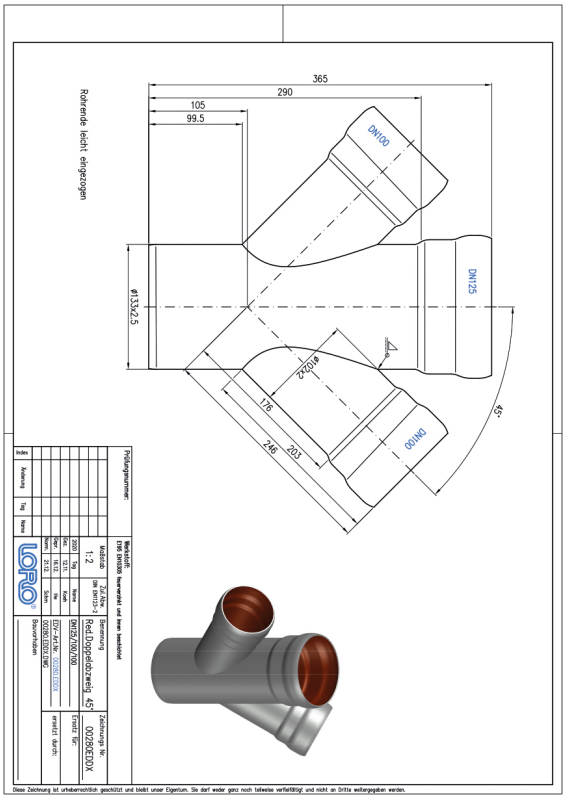

Cikkadatok

EAN kód	4038088015872
ETIM osztály	EC003026
Névleges átmérő	DN 125, DN 100, DN 100
Névleges hossz/fok	45
Külső méretek (MxSzxH)	152 x 427 x 365 mm
Súly	5,00 Kg (STK)
Termékcsoport	1
Vámtarifaszám	73089098
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Letöltések

Alles online

- Szerelési útmutató (PDF)
- Engedély (PDF)
- BIM 3D (STEP)
- Méretrajz (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Prospektus (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)