


LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 150/100/100

LORO-X reduced double branch 45 degrees DN 150/100/100

Description

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150/100/100

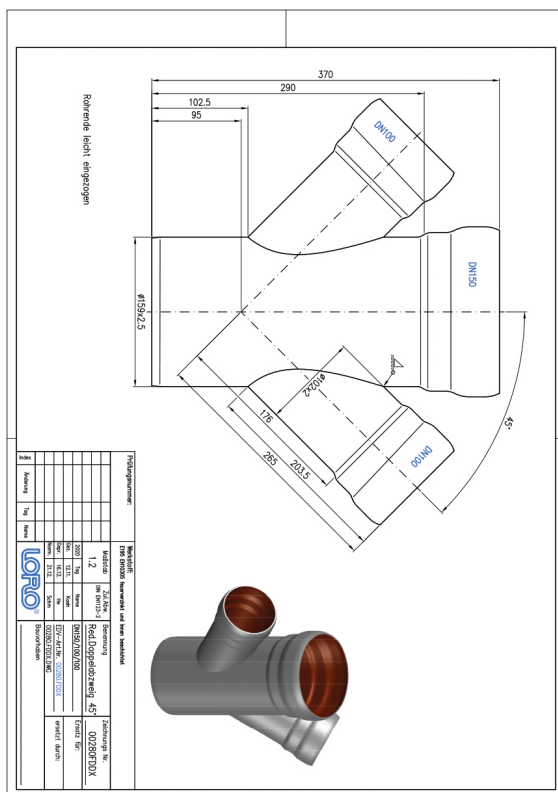

Article information

EAN Code	4038088015919
ETIM Class	EC003026
Nominal diameter	DN 150, DN 100, DN 100
Nominal length/degree	45
Outside measurements (HxWxL)	181 x 454 x 370 mm
Weight	5,60 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Downloads



Alles online

[Installation \(PDF\)](#)
[Certificate \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[CAD drawing \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)