


## LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 150/100/100

LORO-X reduced double branch 45 degrees DN 150/100/100

### Opis

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150/100/100

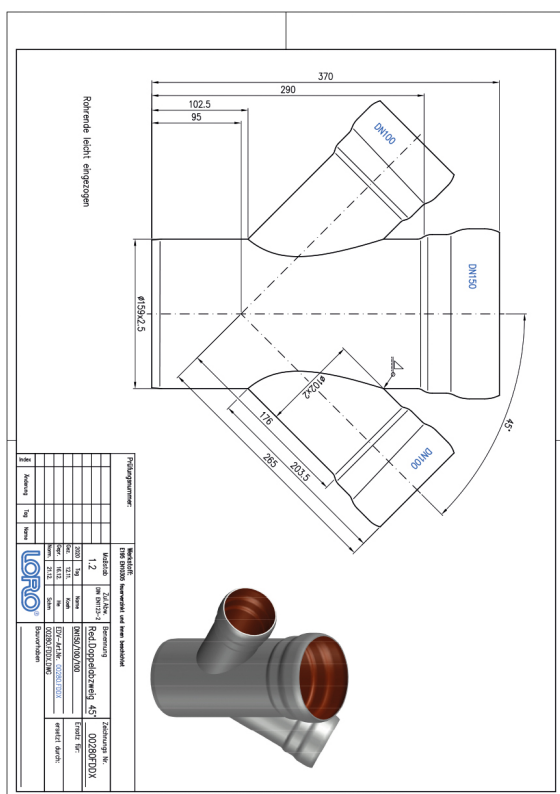

### Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088015919               |
| ETIM klasa              | EC003026                    |
| Nazivni promjer         | DN 150, DN 100, DN 100      |
| Nazivna duljina/stupanj | 45                          |
| Vanjske mjere (VxŠxD)   | 181 x 454 x 370 mm          |
| Težina                  | 5,60 Kg (STK)               |
| Grupa proizvoda         | 1                           |
| Carinski tarifni broj   | 73089098                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

### Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

### Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)