LORO-X REDUCED DOUBLE BRANCH 45 DEGREE DN 150/125/125

LORO-X reduced double branch 45 degrees DN 150/125/125

Popis

LORO-X reducing double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN150/125/125

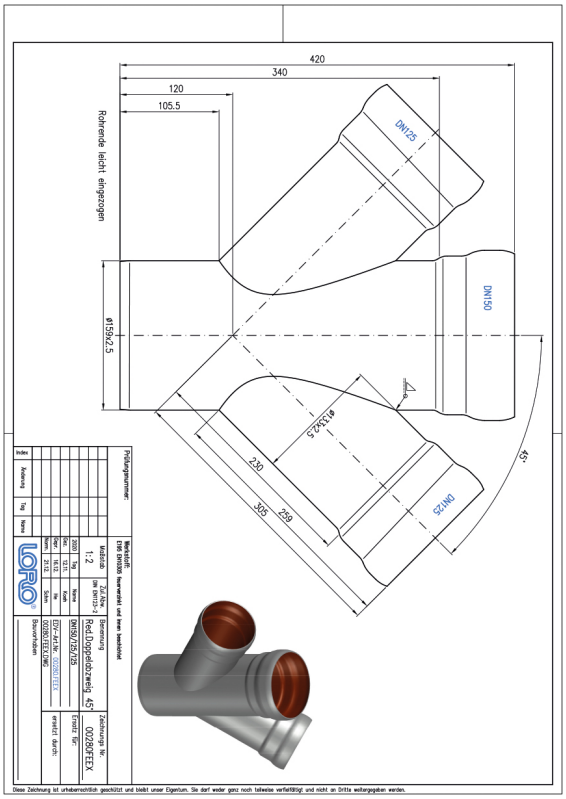

Údaje o artiklu

EAN kód	4038088015926
ETIM třída	EC003026
Jmenovitý průměr	DN 150, DN 125, DN 125
Jmenovitá délka/stupeň	45
Vnější rozměry (VxŠxD)	181 x 534 x 420 mm
Hmotnost	7,60 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Ke stažení

Alles online

- Návod k instalaci (PDF)
- Certifikát (PDF)
- BIM 3D (STEP)
- Výkres rozměrů (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Prospekt (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)