## LORO-X REDUCED CORNER BRANCH 45 DEGREE DN 70/50/50

**LORO-X reduced corner branch 45 degrees DN 70/50/50**

### Opis

LORO-X reducing corner double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70/50/50

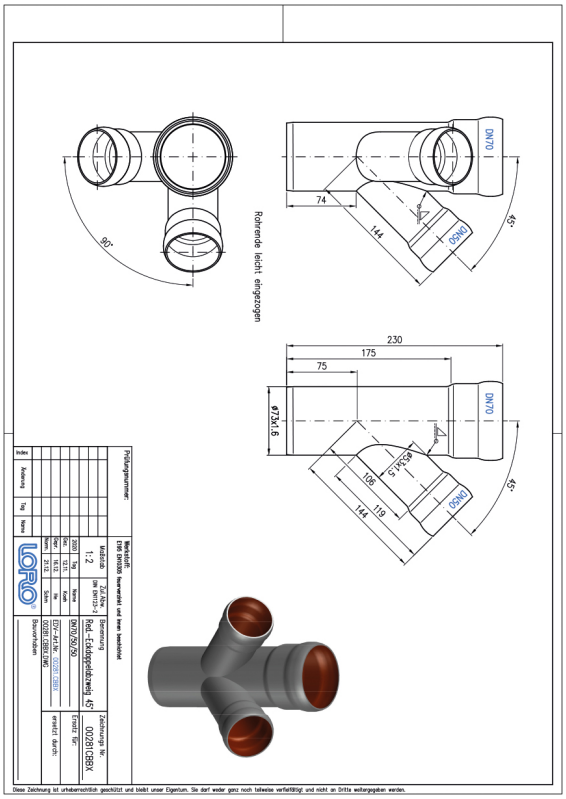


### Podatki o izdelku

| | |
|---|---|
| EAN koda | **4038088016077** |
| ETIM razred | **EC003026** |
| Nazivni premer | **DN 70, DN 50, DN 50** |
| Nazivna dolžina/stopinja | **45** |
| Zunanje mere (VxŠxD) | **165 x 165 x 230 mm** |
| Teža | **1,00 Kg (STK)** |
| Skupina izdelkov | **1** |
| Carinska tarifna številka | **73089098** |
| Material / Barva | **Stahl feuerverzinkt, Silber** |

### Opomba za uporabo

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

### Prenosi

Alles online

- Navodila za vgradnjo (PDF)
- Certifikat (PDF)
- BIM 3D (STEP)
- Merska risba (PDF)
- CAD 2D (DXF)
- BIM IFC4 (parametrisch)
- Prospekt (PDF)
- CAD 3D (DWG)
- BIM 3D (IFC)