
LORO-X REDUCED CORNER BRANCH 45 DEGREE DN 100/70/70

LORO-X reduced corner branch 45 degrees DN 100/70/70

Opis

LORO-X reducing corner double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100/70/70



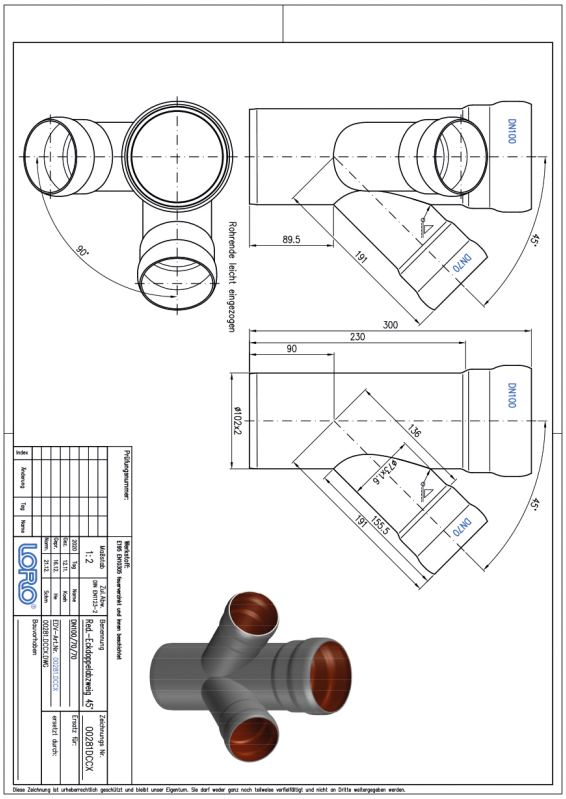

Podaci o artiklu

EAN kod	**4038088016114**
ETIM klasa	**EC003026**
Nazivni promjer	**DN 100, DN 70, DN 70**
Nazivna duljina/stupanj	**45**
Vanjske mjere (VxŠxD)	**222 x 222 x 300 mm**
Težina	**2,50 Kg (STK)**
Grupa proizvoda	**1**
Carinski tarifni broj	**73089098**
Materijal / Boja	**Stahl feuerverzinkt, Silber**

Napomena za upotrebu

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300.Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr.Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Preuzimanja

Alles online

Upute za ugradnju (PDF)
Certifikat (PDF)
BIM 3D (STEP)
Dimenzijski crtež (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Prospekt (PDF)
CAD 3D (DWG)
BIM 3D (IFC)