


LORO-X REDUCED CORNER BRANCH 45 DEGREE DN 100/70/70

LORO-X reduced corner branch 45 degrees DN 100/70/70

Descrição

LORO-X reducing corner double branch, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN100/70/70

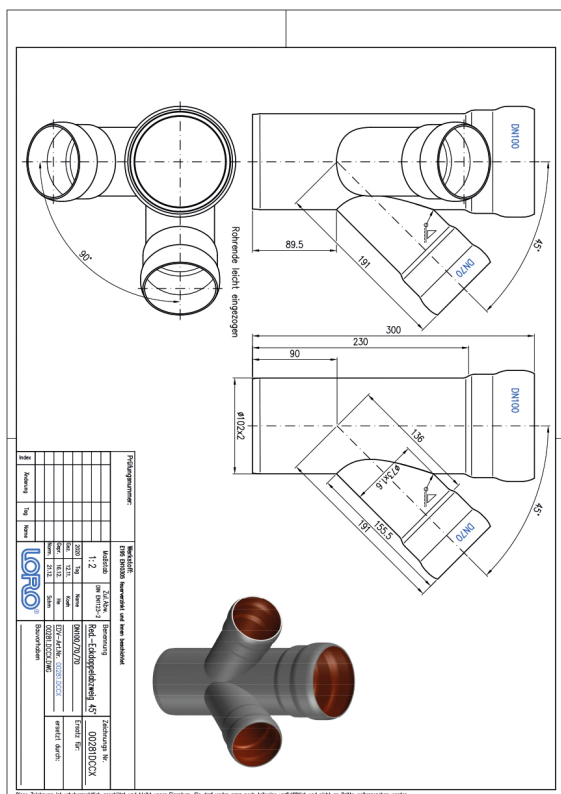

Dados do artigo

Código EAN	4038088016114
Classe ETIM	EC003026
Diâmetro nominal	DN 100, DN 70, DN 70
Comprimento/grau nominal	45
Medidas exteriores (AxLxP)	222 x 222 x 300 mm
Peso	2,50 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Die Buchstaben in den Artikelnummern von Abzweigen stehen für folgende Nennweiten: L = DN32, A = DN40, B = DN50, C = DN70, M = DN80, D = DN100, E = DN125, F = DN150, G = DN200, H = DN250, K = DN300. Bei LORO-X Abzweigen mit Reduktion steht die erste Nennweite für das gerade Rohrstück und die zweite Nennweite für das kleinere, darin mündende Abzweigrohr. Beispiel DN100/70: Ein DN70 Rohr mündet in ein DN100 Rohr in Fließrichtung.

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

Homologação (PDF)

BIM 3D (STEP)

[Desenho cotado \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochura \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)