

## LORO-X BEND 87 DEGREE DN 70

LORO-X bend 87 degrees DN 70

### Kuvaus

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70




### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088018774               |
| ETIM-luokka          | EC003024                    |
| Nimellishalkaisija   | DN 70                       |
| Nimellispituus/-aste | 87                          |
| Ulkomitat (KxLxS)    | 84 x 239 x 237 mm           |
| Paino                | 1,00 Kg (STK)               |
| Tuoteryhmä           | 1                           |
| Tullitariffin numero | 73089098                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

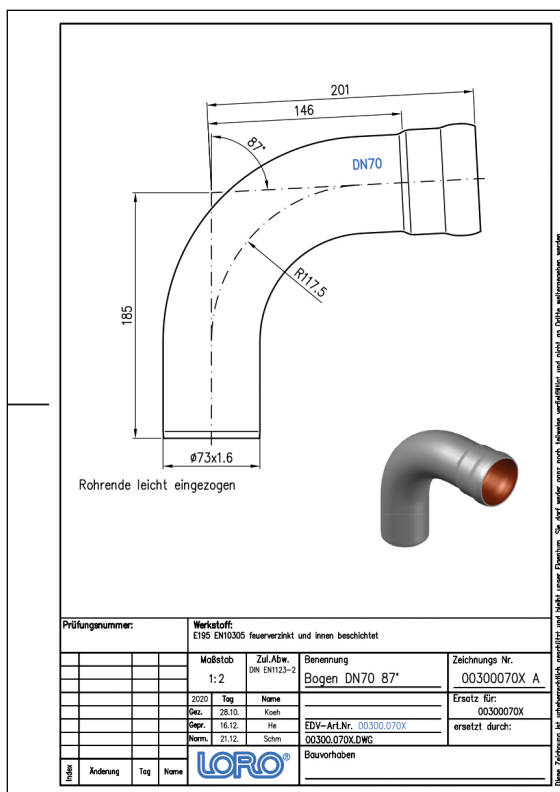

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)