LORO-X BEND 70 DEGREE DN 50

LORO-X bend 70 degrees DN 50

Opis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN50

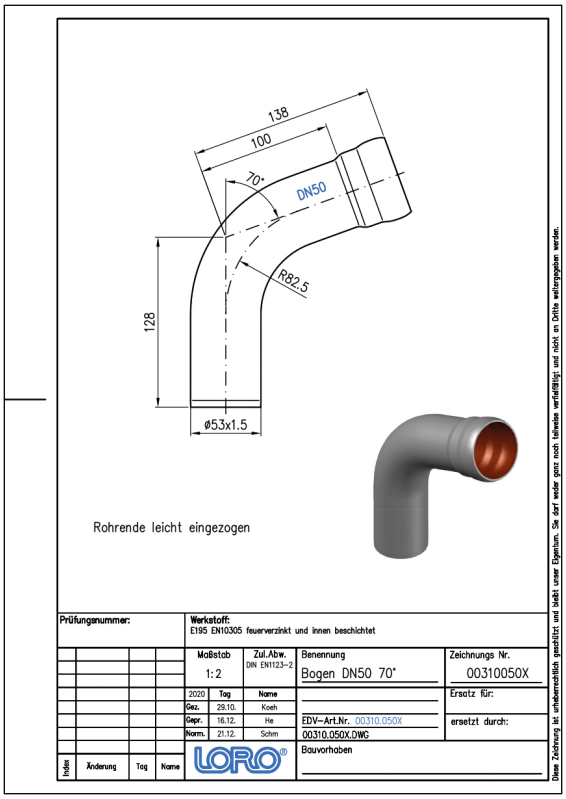

Dane artykułu

Kod EAN	4038088019047
Klasa ETIM	EC003024
Średnica nominalna	DN 50
Długość/stopień nominalny	70
Wymiary zewnętrzne (WxSxD)	63 x 166 x 203 mm
Waga	0,50 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Pobieranie

Alles online

Instrukcja montażu (PDF)
Rysunek wymiarowy (PDF)
Broszura (PDF)
Certyfikat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)
BIM Revit (RFA)