


## LORO-X BEND 70 DEGREE DN 125

## LORO-X bend 70 degrees DN 125

## Beskrivelse

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 70 degrees, DN125

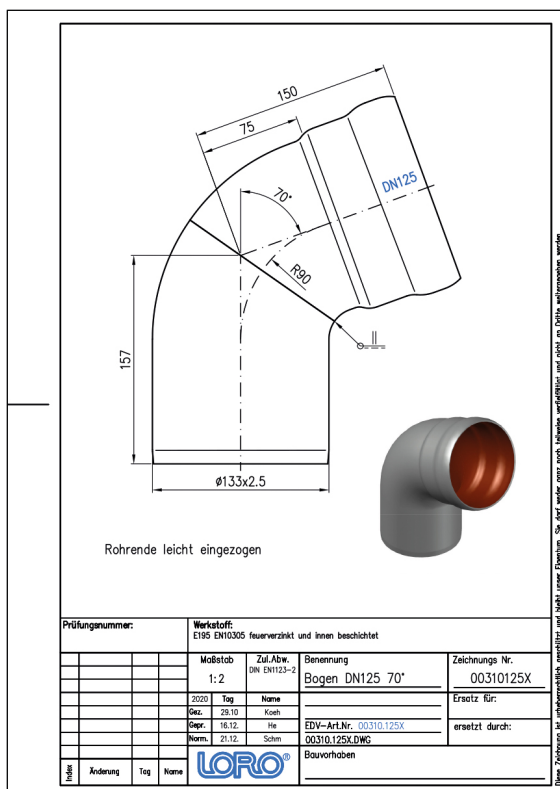

## Artikkeldata

|                          |                             |
|--------------------------|-----------------------------|
| EAN-kode                 | 4038088019092               |
| ETIM-klasse              | EC003024                    |
| Nominell diameter        | DN 125                      |
| Nominell<br>lengde/grad  | 70                          |
| Utvendige mål<br>(HxBxL) | 152 x 232 x 277 mm          |
| Vekt                     | 2,60 Kg (STK)               |
| Produktgruppe            | 1                           |
| Tolltariffnummer         | 73089098                    |
| Materiale / Farge        | Stahl feuerverzinkt, Silber |

## Bruksanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

## Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosjyre \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)