

## LORO-X BEND 30 DEGREE DN 100

### LORO-X bend 30 degrees DN 100

#### Opis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 30 degrees, DN100




#### Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088019405               |
| ETIM razred               | EC003024                    |
| Nazivni premer            | DN 100                      |
| Nazivna dolžina/stopinja  | 30                          |
| Zunanje mere (VxŠxD)      | 118 x 156 x 240 mm          |
| Teža                      | 1,20 Kg (STK)               |
| Skupina izdelkov          | 1                           |
| Carinska tarifna številka | 73089098                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

#### Opomba za uporabo

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

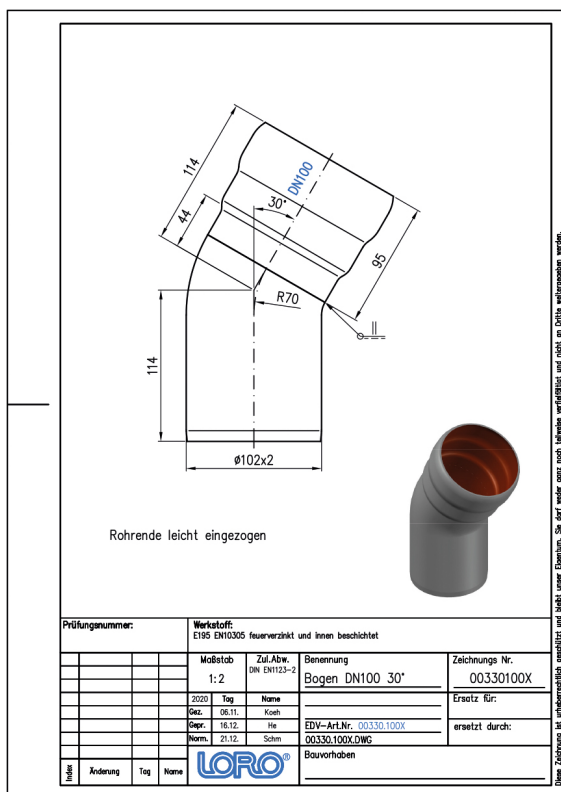

#### Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Merska risba \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)