


## LORO-X BEND 30 DEGREE DN 100

### LORO-X bend 30 degrees DN 100

#### Beskrivelse

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 30 degrees, DN100

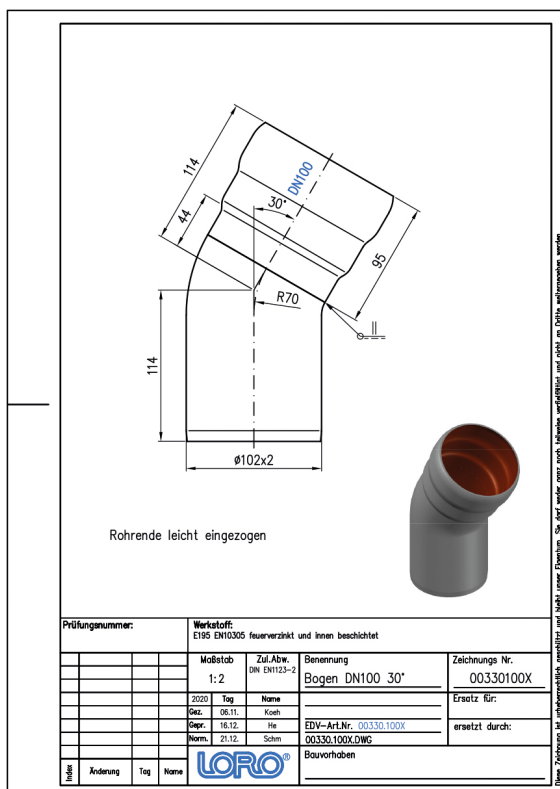

#### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088019405               |
| ETIM-klasse           | EC003024                    |
| Nominell diameter     | DN 100                      |
| Nominell lengde/grad  | 30                          |
| Utvendige mål (HxBxL) | 118 x 156 x 240 mm          |
| Vekt                  | 1,20 Kg (STK)               |
| Produktgruppe         | 1                           |
| Tolltariffnummer      | 73089098                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

#### Bruksanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

#### Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[Godkjenning \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brosjyre \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)