


LORO-X BEND 30 DEGREE DN 125

LORO-X bend 30 degrees DN 125

Beschrijving

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 30 degrees, DN125

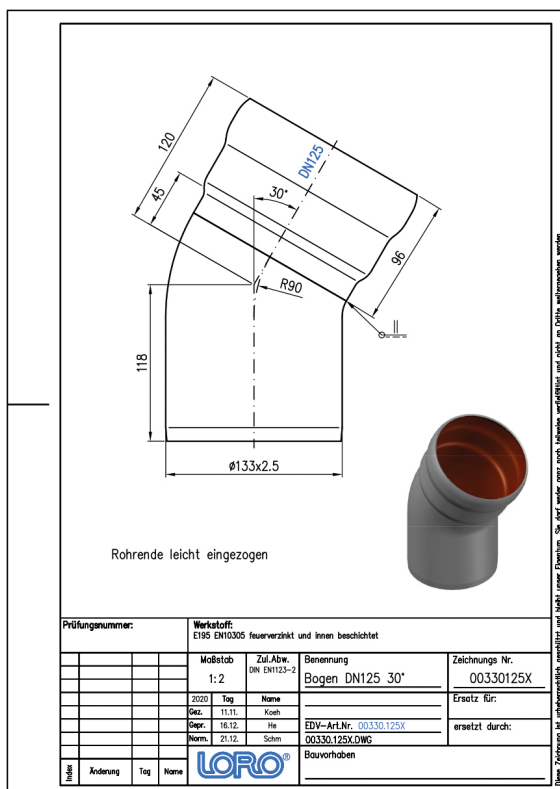

Artikelgegevens

EAN-code	4038088019412
ETIM Klasse	EC003024
Nominale diameter	DN 125
Nominale lengte/graad	30
Buitenafmetingen (HxBxL)	152 x 190 x 258 mm
Gewicht	2,10 Kg (STK)
Productgroep	1
Douanetariefnumme	73089098
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)
[Certificaat \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Maattekening \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisch\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)