

LORO-X BEND 30 DEGREE DN 125

LORO-X bend 30 degrees DN 125

Beskrivelse

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 30 degrees, DN125




Artikeldata

EAN-kode	4038088019412
ETIM Klasse	EC003024
Nominel diameter	DN 125
Nominel længde/grad	30
Ydermål (HxBxL)	152 x 190 x 258 mm
Vægt	2,10 Kg (STK)
Produktgruppe	1
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

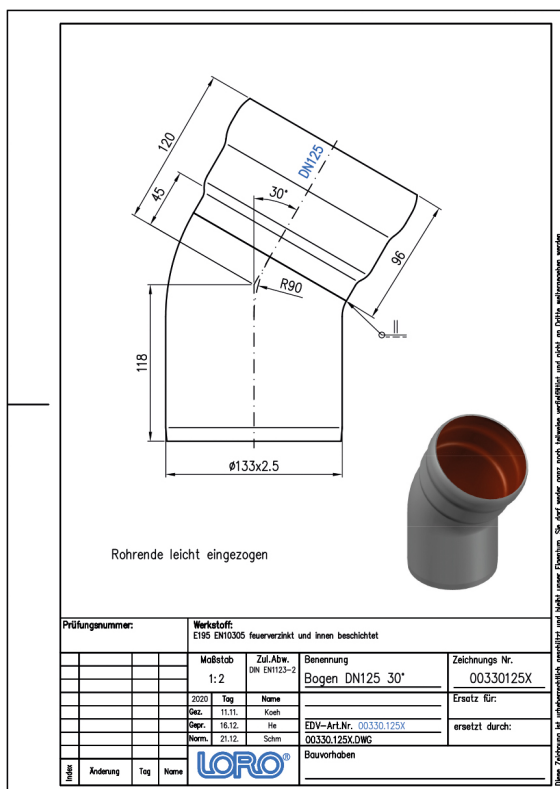

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)
[Certifikat \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måltægning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)