

LORO-X BEND 30 DEGREE DN 150

LORO-X bend 30 degrees DN 150

Beskrivning

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 30 degrees, DN150




Artikeldata

EAN-kod	4038088019429
ETIM-klass	EC003024
Nominell diameter	DN 150
Nominell längd/grad	30
Yttermått (HxBxL)	181 x 225 x 314 mm
Vikt	3,00 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

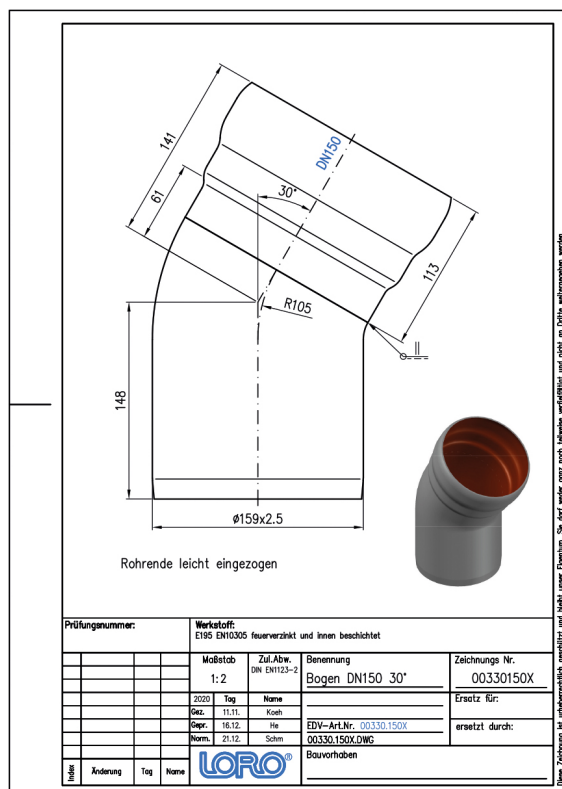

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Broschyr \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)