

LORO-X BEND WITHOUT INTERNAL COATING 15 DEGREE DN 50

LORO-X bend 15 degrees without internal coating DN 50

Kuvaus

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, for filling and ventilation pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 15 degrees, DN50




Tuotetiedot

EAN-koodi	4038088043035
ETIM-luokka	EC003024
Nimellishalkaisija	DN 50
Nimellispituus/-aste	15
Ulkomitat (KxLxS)	63 x 79 x 177 mm
Paino	0,40 Kg (STK)
Tuoteryhmä	5
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

kein Verwendungshinweis notwendig

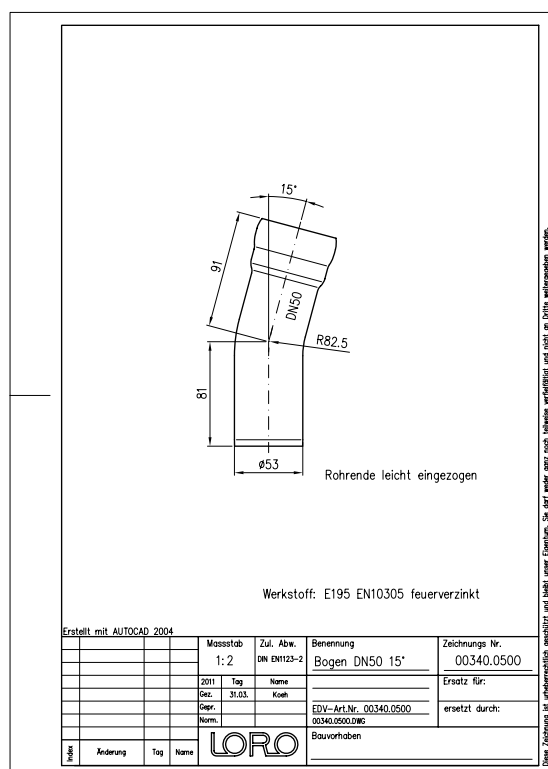

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Esite \(PDF\)](#)

[CAD \(DWG\)](#)