

LORO-X BEND WITHOUT INTERNAL COATING 15 DEGREE DN 50

LORO-X bend 15 degrees without internal coating DN 50

Opis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, for filling and ventilation pipes, building material class A1, dimensionally stable, break-proof, backflow-safe, without inside coating, 15 degrees, DN50




Dane artykułu

Kod EAN	4038088043035
Klasa ETIM	EC003024
Średnica nominalna	DN 50
Długość/stożek nominalny	15
Wymiary zewnętrzne (WxSxD)	63 x 79 x 177 mm
Waga	0,40 Kg (STK)
Grupa produktów	5
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

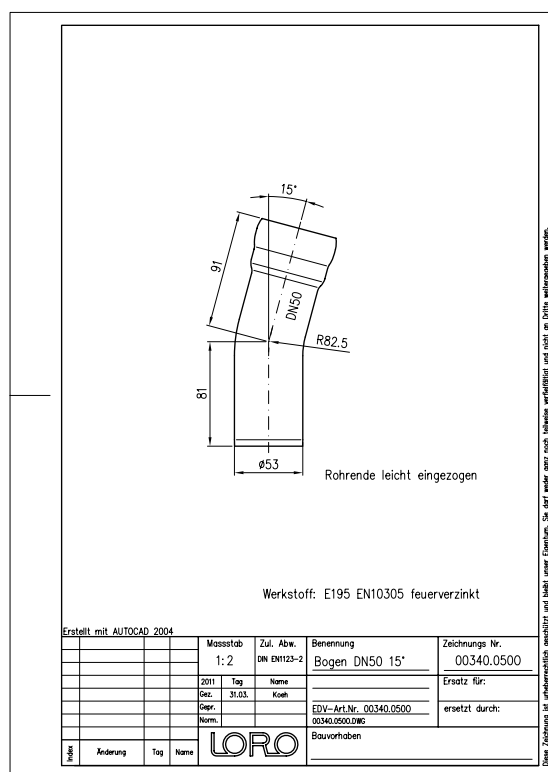

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM IFC4 \(parametryczny\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Broszura \(PDF\)](#)

[CAD \(DWG\)](#)