


## LORO-X BEND 15 DEGREE DN 50

## LORO-X bend 15 degrees DN 50

## Opis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN50

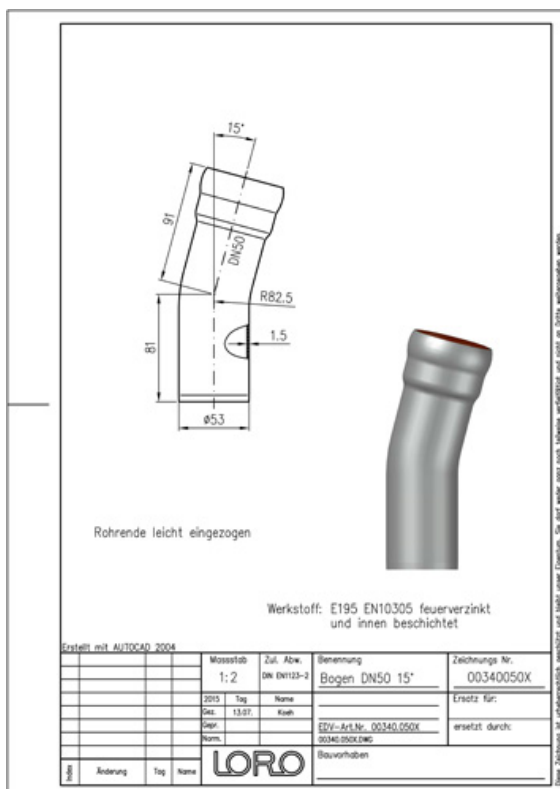

## Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088019504               |
| ETIM razred               | EC003024                    |
| Nazivni premer            | DN 50                       |
| Nazivna dolžina/stopinja  | 15                          |
| Zunanje mere (VxŠxD)      | 63 x 79 x 177 mm            |
| Teža                      | 0,40 Kg (STK)               |
| Skupina izdelkov          | 1                           |
| Carinska tarifna številka | 73089098                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

## Opomba za uporabo

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

## Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

[Certifikat \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Merska risba \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)