


LORO-X BEND 15 DEGREE DN 50

LORO-X bend 15 degrees DN 50

Beskrivelse

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN50

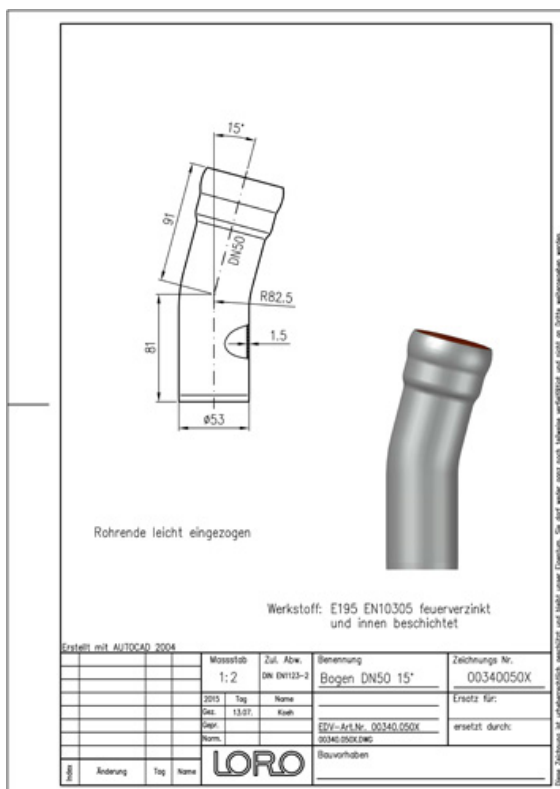

Artikeldata

EAN-kode	4038088019504
ETIM Klasse	EC003024
Nominal diameter	DN 50
Nominal længde/grad	15
Ydermål (HxBxL)	63 x 79 x 177 mm
Vægt	0,40 Kg (STK)
Produktgruppe	1
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)
[Certifikat \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[BIM Revit \(RFA\)](#)
[Måltegning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM IFC4 \(parametrisk\)](#)
[Brochure \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[BIM 3D \(IFC\)](#)