LORO-X BEND 15 DEGREE DN 50

LORO-X bend 15 degrees DN 50

Opis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN50

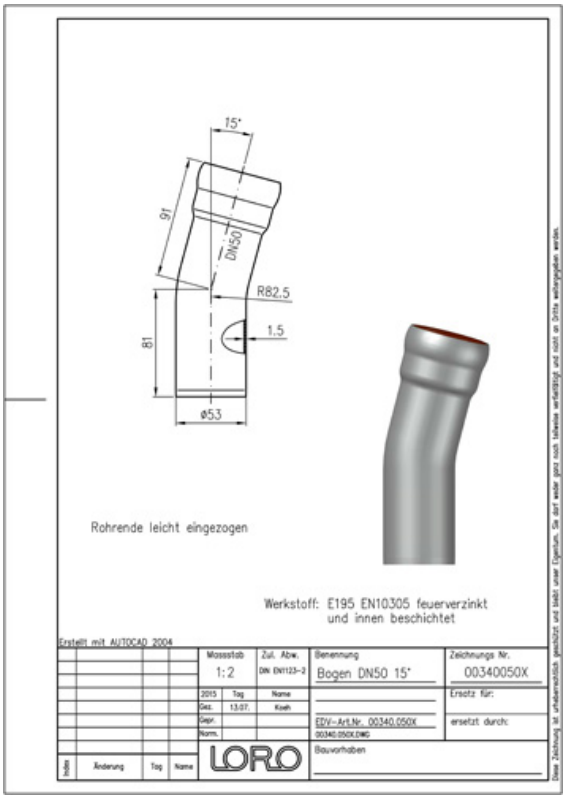

Dane artykułu

Kod EAN	**4038088019504**
Klasa ETIM	**EC003024**
Średnica nominalna	**DN 50**
Długość/stopień nominalny	**15**
Wymiary zewnętrzne (WxSxD)	**63 x 79 x 177 mm**
Waga	**0,40 Kg (STK)**
Grupa produktów	**1**
Numer taryfy celnej	**73089098**
Materiał / Kolor	**Stahl feuerverzinkt, Silber**

Wskazówki dotyczące użytkowania

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Pobieranie

Alles online

Instrukcja montażu (PDF)
Rysunek wymiarowy (PDF)
Broszura (PDF)
Certyfikat (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM IFC4 (parametrisch)
BIM 3D (IFC)
BIM Revit (RFA)