

LORO-X BEND 15 DEGREE DN 70

LORO-X bend 15 degrees DN 70

Beskrivning

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN70




Artikeldata

EAN-kod	4038088019528
ETIM-klass	EC003024
Nominell diameter	DN 70
Nominell längd/grad	15
Yttermått (HxBxL)	84 x 103 x 201 mm
Vikt	0,60 Kg (STK)
Produktgrupp	1
Tullnummer	73089098
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

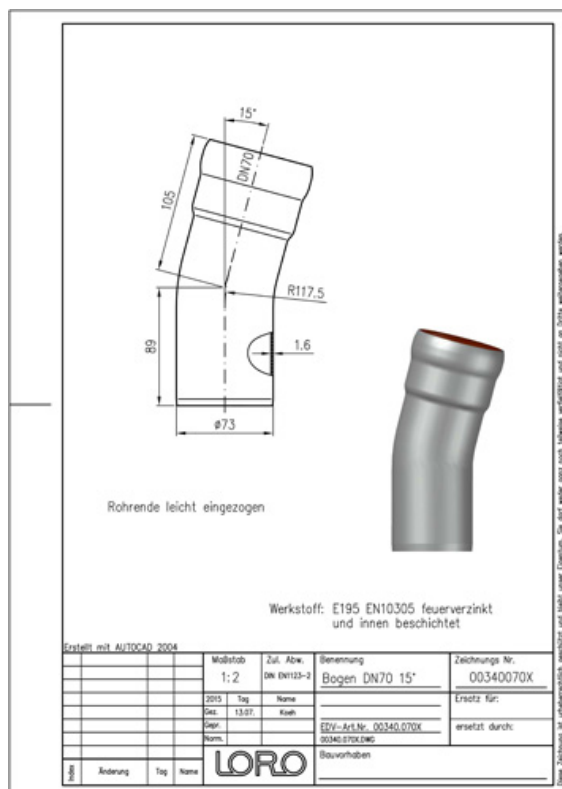

Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Måttitning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Broschyr \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)