

## LORO-X BEND 15 DEGREE DN 80

LORO-X bend 15 degrees DN 80

### Descriere

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN 80




### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088019535               |
| Clasă ETIM                    | EC003024                    |
| Diametru nominal              | DN 80                       |
| Lungime/grad nominal          | 15                          |
| Dimensiuni exterioare (ÎxLxA) | 102 x 125 x 234 mm          |
| Greutate                      | 0,91 Kg (STK)               |
| Grupă de produse              | 1                           |
| Număr tarif vamal             | 73089098                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

### Notă de utilizare

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

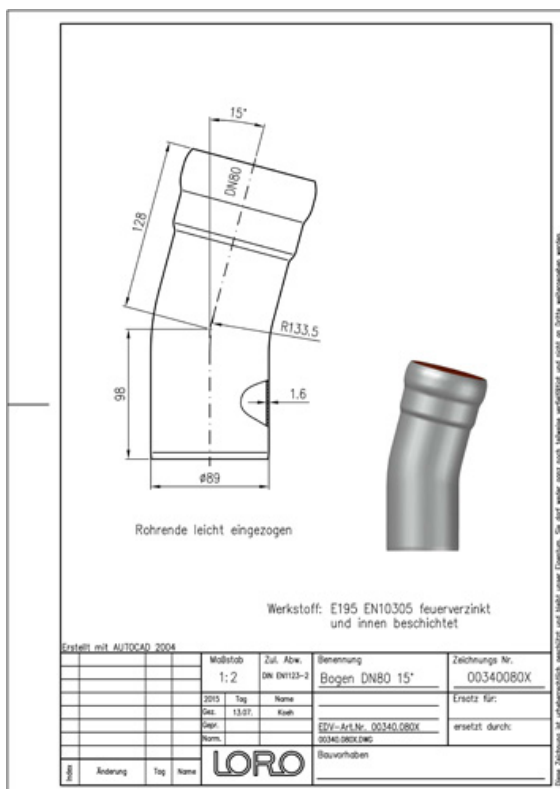

### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desen CAD \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Broșură \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)