

## LORO-X BEND 15 DEGREE DN 125

### LORO-X bend 15 degrees DN 125

#### Beskrivning

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN125




#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088019559               |
| ETIM-klass          | EC003024                    |
| Nominell diameter   | DN 125                      |
| Nominell längd/grad | 15                          |
| Yttermått (HxBxL)   | 152 x 166 x 239 mm          |
| Vikt                | 2,00 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

#### Användningsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

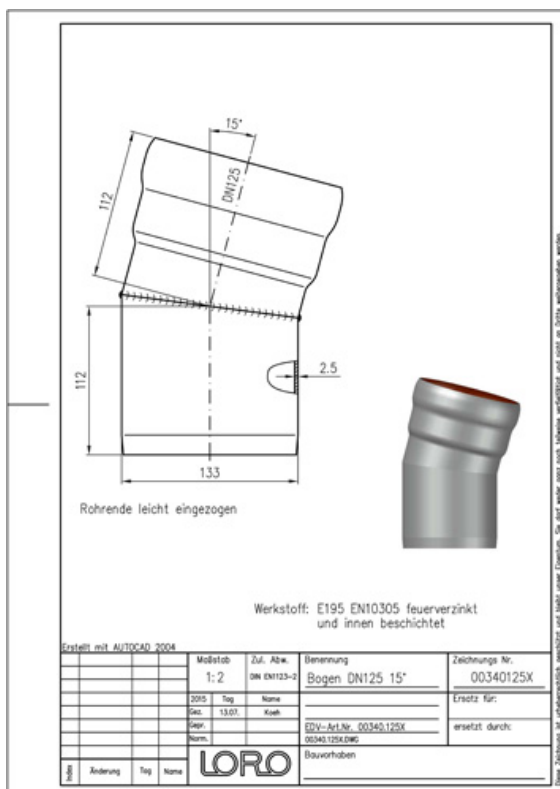

#### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)