

LORO-X BEND 15 DEGREE DN 125

LORO-X bend 15 degrees DN 125

Beskrivelse

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN125




Artikeldata

EAN-kode	4038088019559
ETIM Klasse	EC003024
Nominel diameter	DN 125
Nominel længde/grad	15
Ydermål (HxBxL)	152 x 166 x 239 mm
Vægt	2,00 Kg (STK)
Produktgruppe	1
Toldtarifnummer	73089098
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

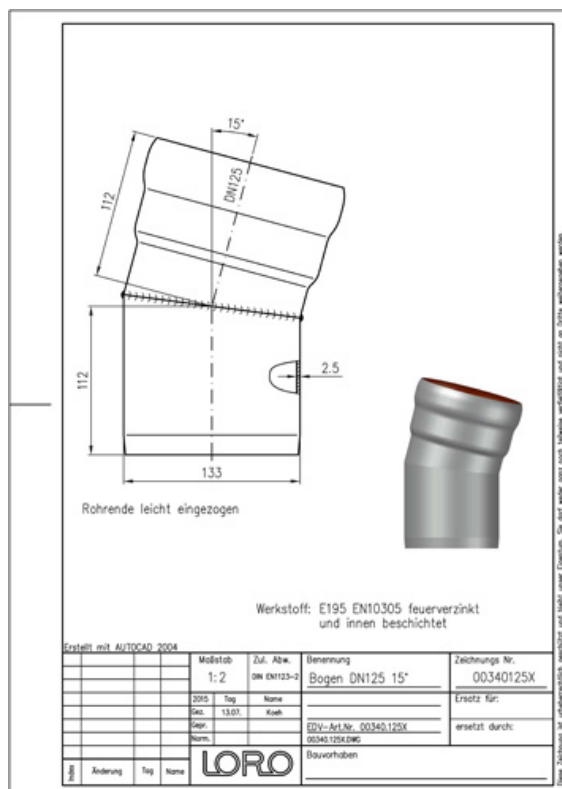

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[Certifikat \(PDF\)](#)

BIM 3D (STEP)

BIM Revit (RFA)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)