LORO-X BEND 15 DEGREE DN 125

LORO-X bend 15 degrees DN 125

Popis

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN125

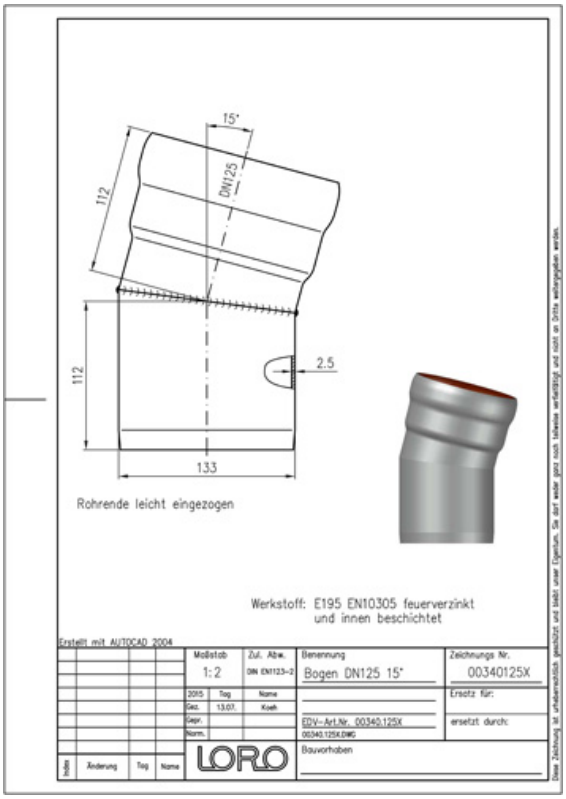

Údaje o artiklu

EAN kód	4038088019559
ETIM třída	EC003024
Jmenovitý průměr	DN 125
Jmenovitá délka/stupeň	15
Vnější rozměry (VxŠxD)	152 x 166 x 239 mm
Hmotnost	2,00 Kg (STK)
Skupina produktů	1
Celní sazebník	73089098
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Ke stažení

Alles online

[Návod k instalaci (PDF)](#)
[Certifikát (PDF)](#)
[BIM 3D (STEP)](#)
[BIM Revit (RFA)](#)
[Výkres rozměrů (PDF)](#)
[CAD 2D (DXF)](#)
[BIM IFC4 (parametrisch)](#)
[Prospekt (PDF)](#)
[CAD 3D (DWG)](#)
[BIM 3D (IFC)](#)