
# LORO-X BEND 15 DEGREE DN 150

**LORO-X bend 15 degrees DN 150**

## Description

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN150



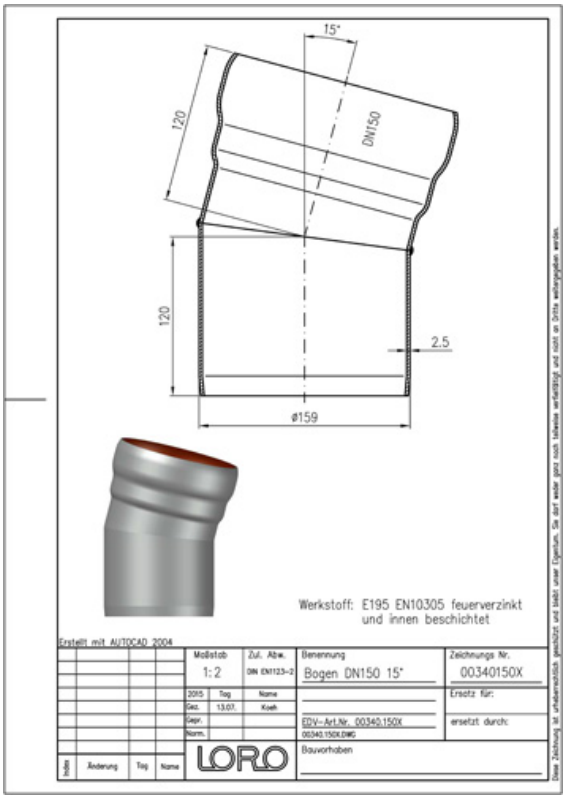


## Article information

| | |
|---|---|
| EAN Code | **4038088019566** |
| ETIM Class | **EC003024** |
| Nominal diameter | **DN 150** |
| Nominal length/degree | **15** |
| Outside measurements (HxWxL) | **181 x 195 x 258 mm** |
| Weight | **2,70 Kg (STK)** |
| Product group | **1** |
| Customs tariff number | **73089098** |
| Material / Color | **Stahl feuerverzinkt, Silber** |

## Usage note

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

## Downloads

Alles online

Installation (PDF)
Certificate (PDF)
BIM 3D (STEP)
BIM Revit (RFA)
CAD drawing (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Brochure (PDF)
CAD 3D (DWG)
BIM 3D (IFC)