


## LORO-X BEND 15 DEGREE DN 150

### LORO-X bend 15 degrees DN 150

#### Description

LORO-X bend, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 15 degrees, DN150

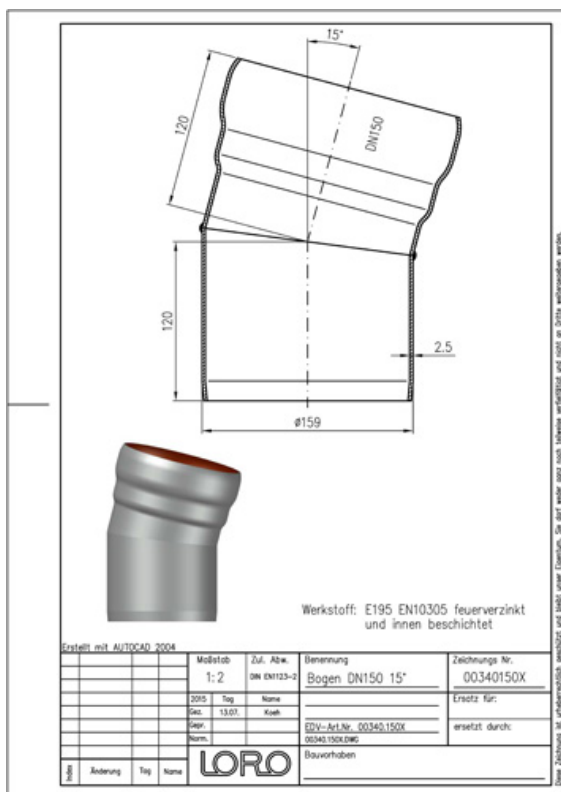

#### Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088019566               |
| Classe ETIM                    | EC003024                    |
| Diamètre nominal               | DN 150                      |
| Longueur/degré nominal         | 15                          |
| Dimensions extérieures (HxLxP) | 181 x 195 x 258 mm          |
| Poids                          | 2,70 Kg (STK)               |
| Groupe de produits             | 1                           |
| Numéro tarifaire douanier      | 73089098                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

#### Note d'utilisation

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

#### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[BIM Revit \(RFA\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(paramétrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)