LORO-X SHORT RADIUS BEND 87 DEGREE DN 40

LORO-X bend with narrow radius 87 degrees DN 40

Kuvaus

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN40

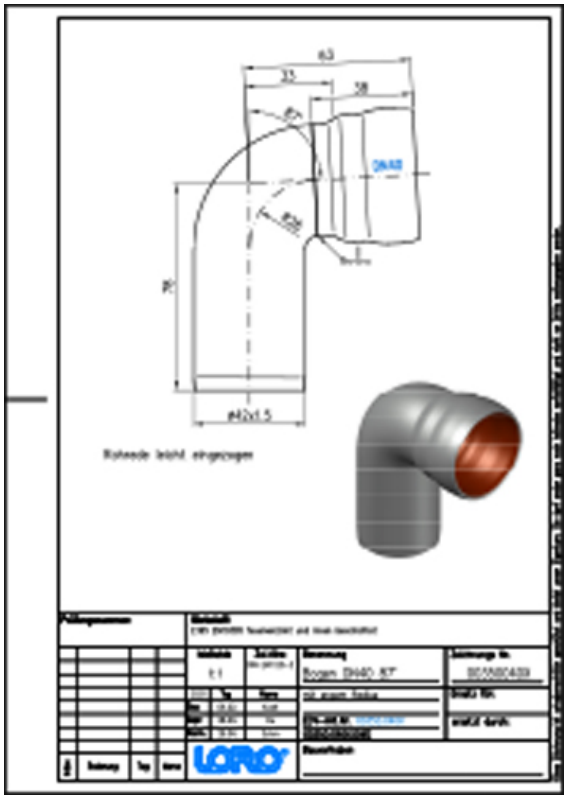

Tuotetiedot

EAN-koodi	**4038088053782**
ETIM-luokka	**EC003024**
Nimellishalkaisija	**DN 40**
Nimellispituus/-aste	**87**
Ulkomitat (KxLxS)	**51 x 85 x 107 mm**
Paino	**0,25 Kg (STK)**
Tuoteryhmä	**1**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Lataukset

Alles online

Asennusohje (PDF)
Hyväksyntä (PDF)
BIM 3D (STEP)
Mittapiirustus (PDF)
CAD 2D (DXF)
BIM IFC4 (parametrisch)
Esite (PDF)
CAD 3D (DWG)
BIM 3D (IFC)