


## LORO-X SHORT RADIUS BEND 87 DEGREE DN 40

LORO-X bend with narrow radius 87 degrees DN 40

### Opis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN40

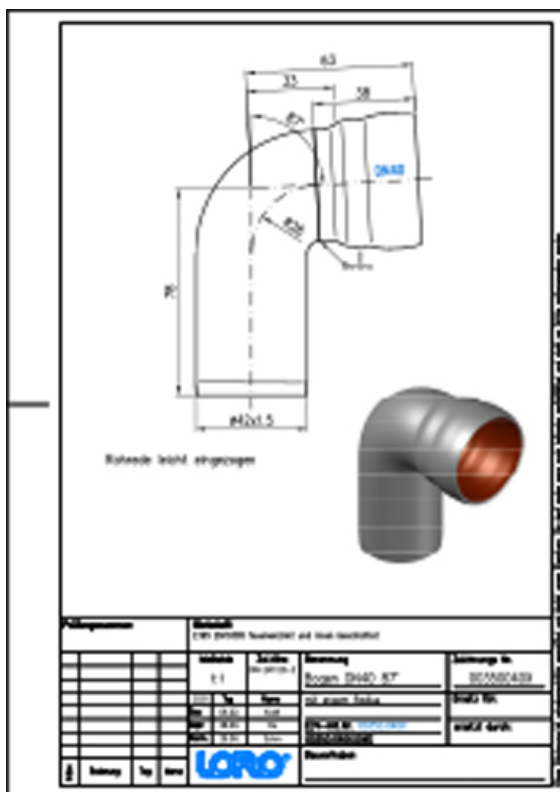

### Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088053782               |
| ETIM klasa              | EC003024                    |
| Nazivni promjer         | DN 40                       |
| Nazivna duljina/stupanj | 87                          |
| Vanjske mjere (VxŠxD)   | 51 x 85 x 107 mm            |
| Težina                  | 0,25 Kg (STK)               |
| Grupa proizvoda         | 1                           |
| Carinski tarifni broj   | 73089098                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

### Napomena za upotrebu

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

### Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[Certifikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)