


LORO-X SHORT RADIUS BEND 87 DEGREE DN 50

LORO-X bend with narrow radius 87 degrees DN 50

Description

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50

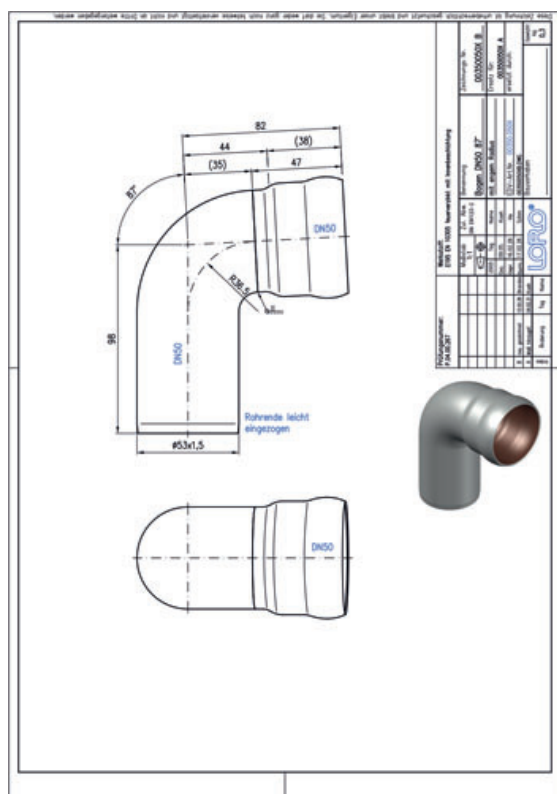

Article information

EAN Code	4038088019603
ETIM Class	EC003024
Nominal diameter	DN 50
Nominal length/degree	87
Outside measurements (HxWxL)	63 x 110 x 133 mm
Weight	0,40 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD drawing \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)