


LORO-X SHORT RADIUS BEND 87 DEGREE DN 50

LORO-X bend with narrow radius 87 degrees DN 50

Описание

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50

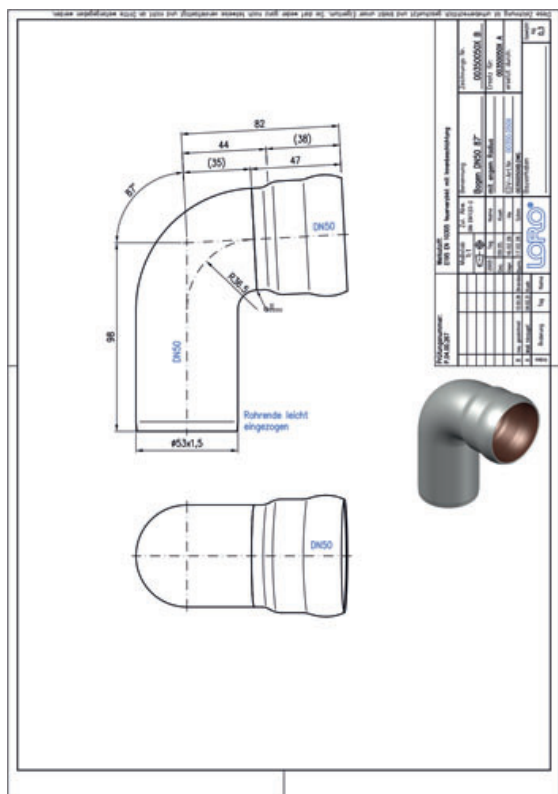

Данни за артикула

ЕАН код	4038088019603
ЕТИМ клас	EC003024
Номинален диаметър	DN 50
Номинална дължина/градус	87
Външни размери (ВxШxД)	63 x 110 x 133 mm
Тегло	0,40 Kg (STK)
Продуктова група	1
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[Сертификат \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[CAD чертеж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Брошура \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)