


LORO-X SHORT RADIUS BEND 87 DEGREE DN 50

LORO-X bend with narrow radius 87 degrees DN 50

Opis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50

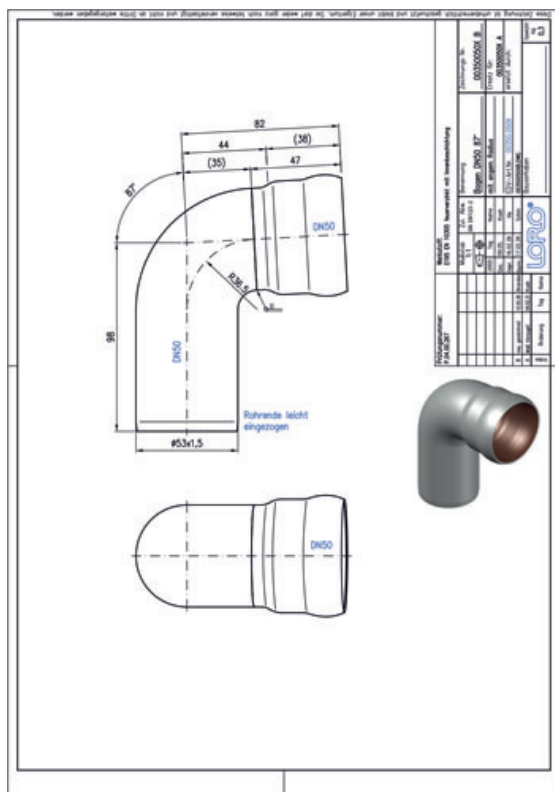

Podatki o izdelku

EAN koda	4038088019603
ETIM razred	EC003024
Nazivni premer	DN 50
Nazivna dolžina/stopinja	87
Zunanje mere (VxŠxD)	63 x 110 x 133 mm
Teža	0,40 Kg (STK)
Skupina izdelkov	1
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

Certifikat (PDF)

BIM 3D (STEP)

[Merska risba \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)