


LORO-X SHORT RADIUS BEND 87 DEGREE DN 50

LORO-X bend with narrow radius 87 degrees DN 50

Descrição

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN50

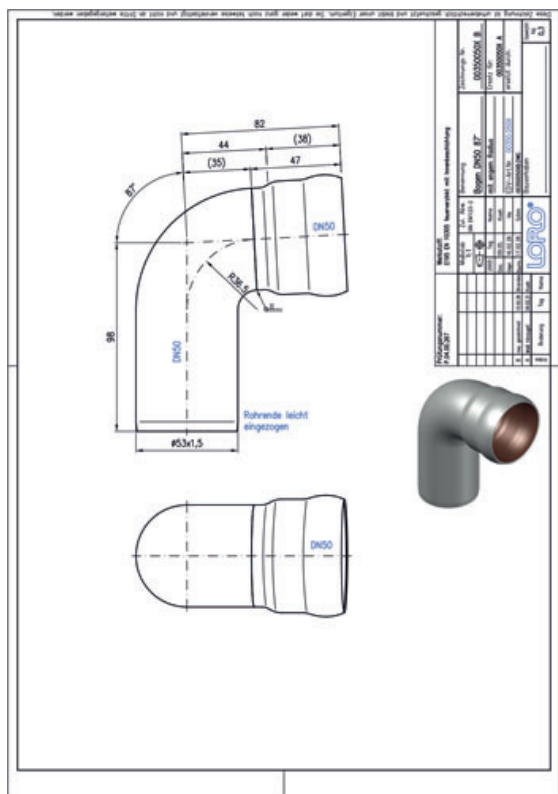

Dados do artigo

Código EAN	4038088019603
Classe ETIM	EC003024
Diâmetro nominal	DN 50
Comprimento/grau nominal	87
Medidas exteriores (AxLxP)	63 x 110 x 133 mm
Peso	0,40 Kg (STK)
Grupo de produtos	1
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

Homologação (PDF)

BIM 3D (STEP)

[Desenho cotado \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochura \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)