


## LORO-X SHORT RADIUS BEND 87 DEGREE DN 70

LORO-X bend with narrow radius 87 degrees DN 70

### Beskrivning

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70

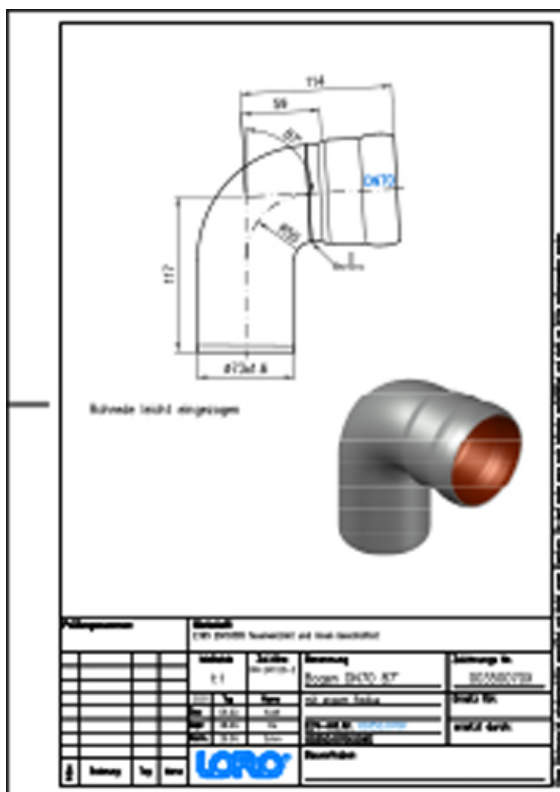

### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088019610               |
| ETIM-klass          | EC003024                    |
| Nominell diameter   | DN 70                       |
| Nominell längd/grad | 87                          |
| Yttermått (HxBxL)   | 84 x 152 x 165 mm           |
| Vikt                | 0,70 Kg (STK)               |
| Produktgrupp        | 1                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

### Användningsanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkännande \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Måttitning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisk\)](#)

[Broschyr \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)