


LORO-X SHORT RADIUS BEND 87 DEGREE DN 70

LORO-X bend with narrow radius 87 degrees DN 70

Popis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70

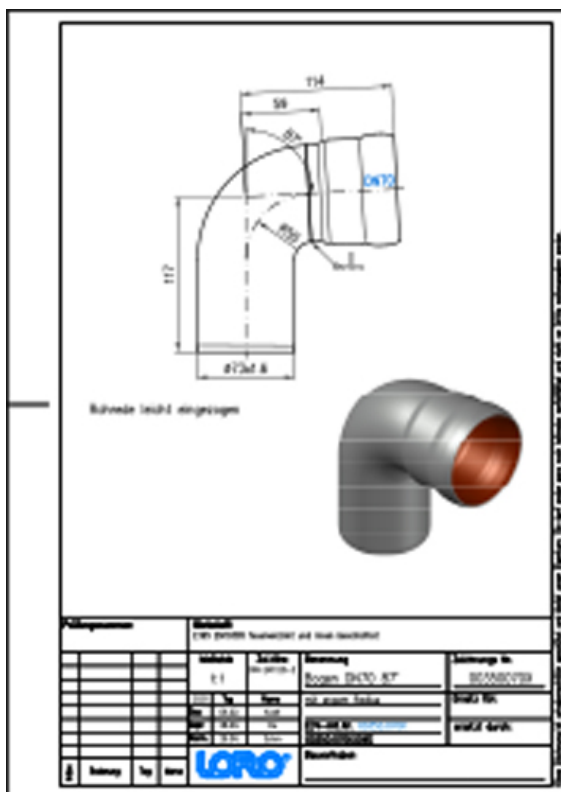

Údaje o artikli

EAN kód	4038088019610
ETIM trieda	EC003024
Menovitý priemer	DN 70
Menovitá dĺžka/stupeň	87
Vonkajšie rozmery (VxŠxH)	84 x 152 x 165 mm
Hmotnosť	0,70 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)