


## LORO-X SHORT RADIUS BEND 87 DEGREE DN 70

**LORO-X bend with narrow radius 87 degrees DN 70**

## Opis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN70

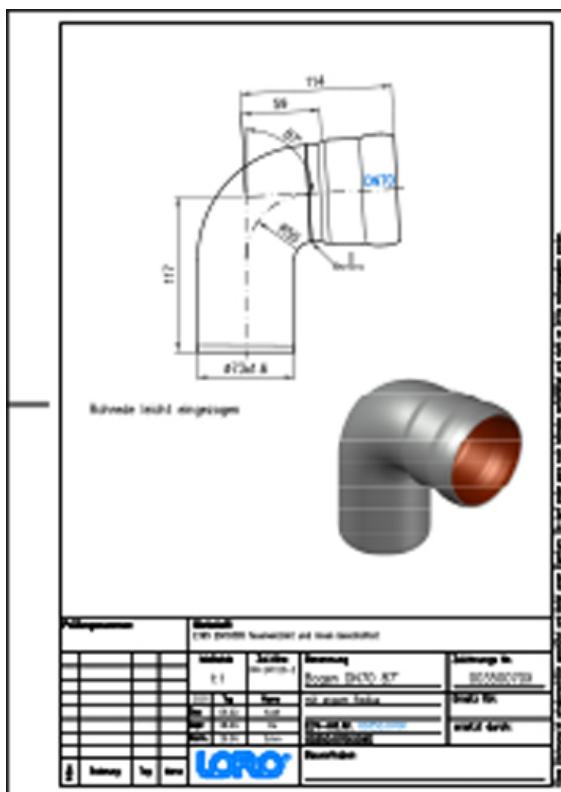

## Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088019610               |
| ETIM klasa              | EC003024                    |
| Nazivni promjer         | DN 70                       |
| Nazivna duljina/stupanj | 87                          |
| Vanjske mjere (VxŠxD)   | 84 x 152 x 165 mm           |
| Težina                  | 0,70 Kg (STK)               |
| Grupa proizvoda         | 1                           |
| Carinski tarifni broj   | 73089098                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

## Napomena za upotrebu

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

## Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

Certifikat (PDF)

BIM 3D (STEP)

[Dimenzijski crtež \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Prospekt \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)