


LORO-X SHORT RADIUS BEND 87 DEGREE DN 80

LORO-X bend with narrow radius 87 degrees DN 80

Description

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80

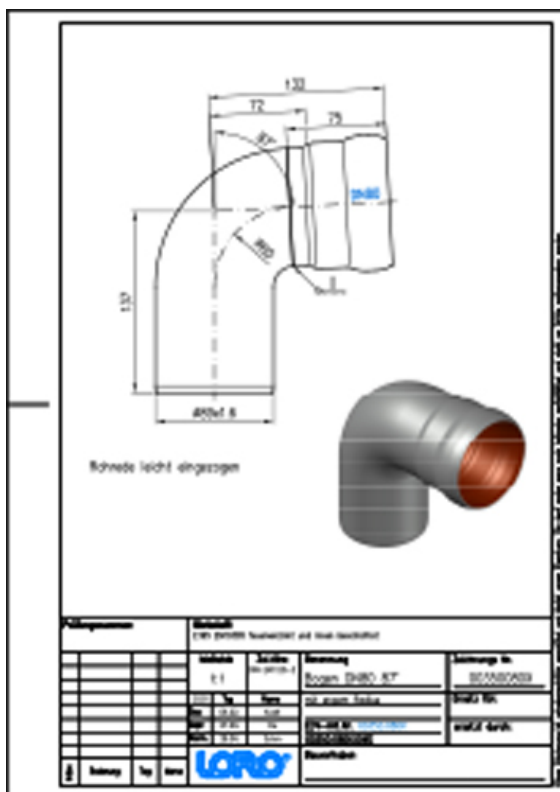

Article information

EAN Code	4038088057773
ETIM Class	EC003024
Nominal diameter	DN 80
Nominal length/degree	87
Outside measurements (HxWxL)	102 x 179 x 194 mm
Weight	1,00 Kg (STK)
Product group	1
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Downloads



Alles online

[Installation \(PDF\)](#)

[Certificate \(PDF\)](#)

BIM 3D (STEP)

[CAD drawing \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)