


LORO-X SHORT RADIUS BEND 87 DEGREE DN 80

LORO-X bend with narrow radius 87 degrees DN 80

Kuvaus

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80

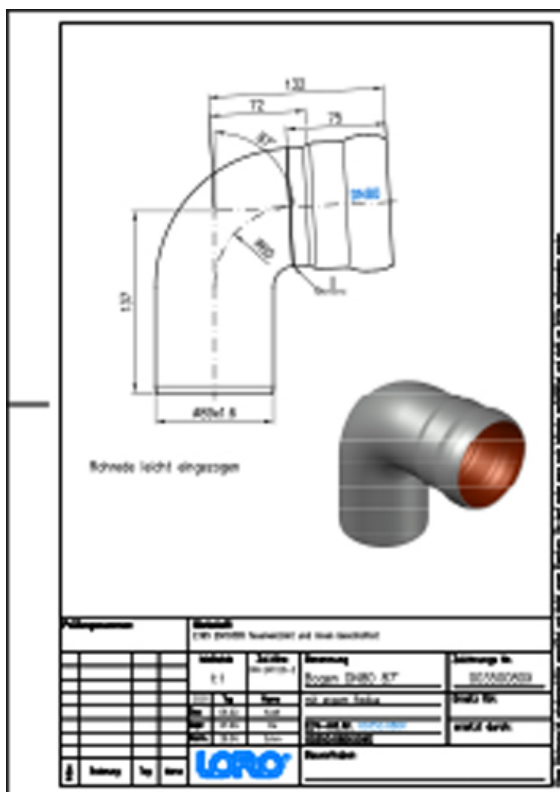

Tuotetiedot

EAN-koodi	4038088057773
ETIM-luokka	EC003024
Nimellishalkaisija	DN 80
Nimellispituus/-aste	87
Ulkomitat (KxLxS)	102 x 179 x 194 mm
Paino	1,00 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[Hyväksyntä \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Esite \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)