


LORO-X SHORT RADIUS BEND 87 DEGREE DN 80

LORO-X bend with narrow radius 87 degrees DN 80

Beschrijving

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80

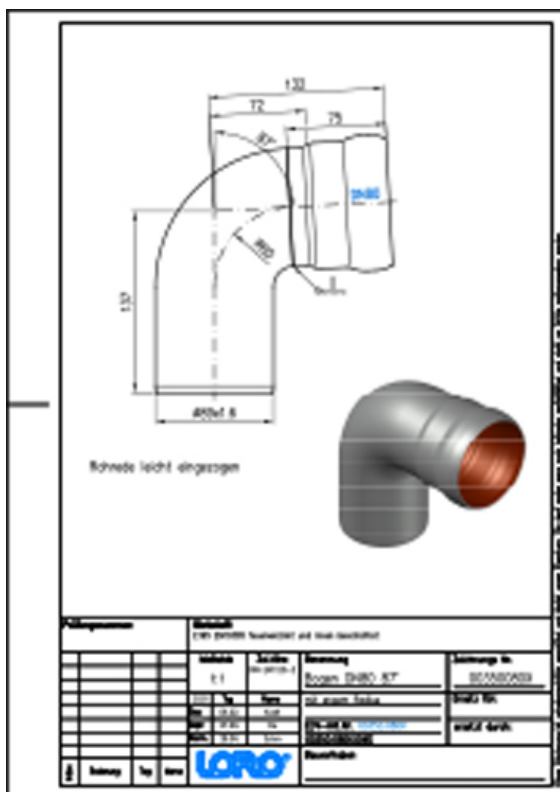

Artikelgegevens

EAN-code	4038088057773
ETIM Klasse	EC003024
Nominale diameter	DN 80
Nominale lengte/graad	87
Buitenafmetingen (HxBxL)	102 x 179 x 194 mm
Gewicht	1,00 Kg (STK)
Productgroep	1
Douanetariefnumme	73089098
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)