


LORO-X SHORT RADIUS BEND 87 DEGREE DN 80

LORO-X bend with narrow radius 87 degrees DN 80

Beskrivelse

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 87 degrees, DN 80

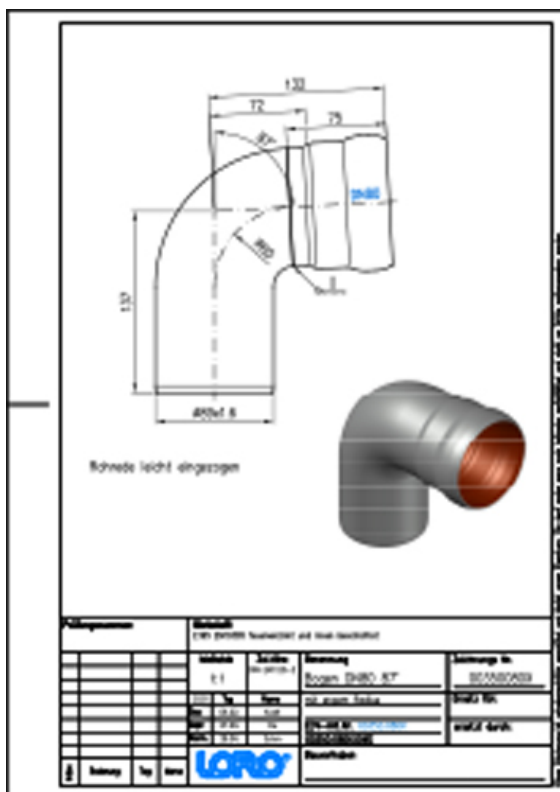

Artikkeldata

EAN-kode	4038088057773
ETIM-klasse	EC003024
Nominell diameter	DN 80
Nominell lengde/grad	87
Utvendige mål (HxBxL)	102 x 179 x 194 mm
Vekt	1,00 Kg (STK)
Produktgruppe	1
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

[Godkjenning \(PDF\)](#)

BIM 3D (STEP)

[Måltegning \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosjyre \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)