

LORO-X SHORT RADIUS BEND 45 DEGREE DN 40

LORO-X bend with narrow radius 45 degrees DN 40

Beschrijving

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN40




Artikelgegevens

EAN-code	4038088053799
ETIM Klasse	EC003024
Nominale diameter	DN 40
Nominale lengte/graad	45
Buitenafmetingen (HxBxL)	51 x 74 x 117 mm
Gewicht	0,20 Kg (STK)
Productgroep	1
Douanetariefnummer	73089098
r	
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

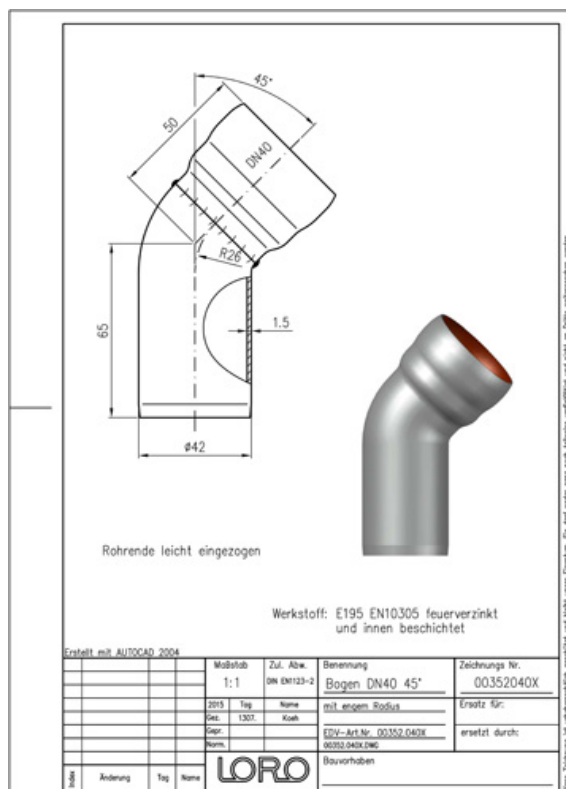

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[Certificaat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Maattekening \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)