


LORO-X SHORT RADIUS BEND 45 DEGREE DN 40

LORO-X bend with narrow radius 45 degrees DN 40

Description

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN40

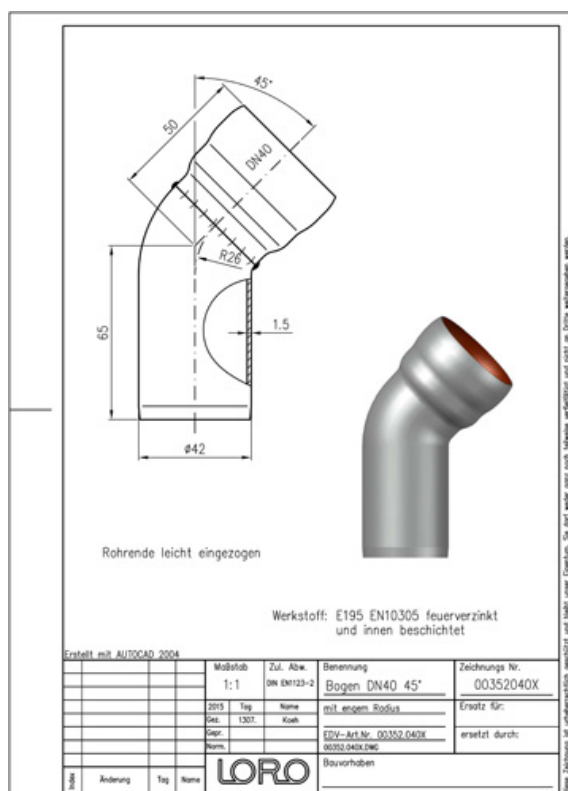

Données de l'article

Code EAN	4038088053799
Classe ETIM	EC003024
Diamètre nominal	DN 40
Longueur/degré nominal	45
Dimensions extérieures (HxLxP)	51 x 74 x 117 mm
Poids	0,20 Kg (STK)
Groupe de produits	1
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

[Dessin dimensionnel \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brochure \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)