

LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

Descrizione

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Date articol

Cod EAN	4038088019658
Clasă ETIM	EC003024
Diametru nominal	DN 50
Lungime/grad nominal	45
Dimensiuni exterioare (ÎxLxA)	63 x 91 x 144 mm
Greutate	0,30 Kg (STK)
Grupă de produse	1
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

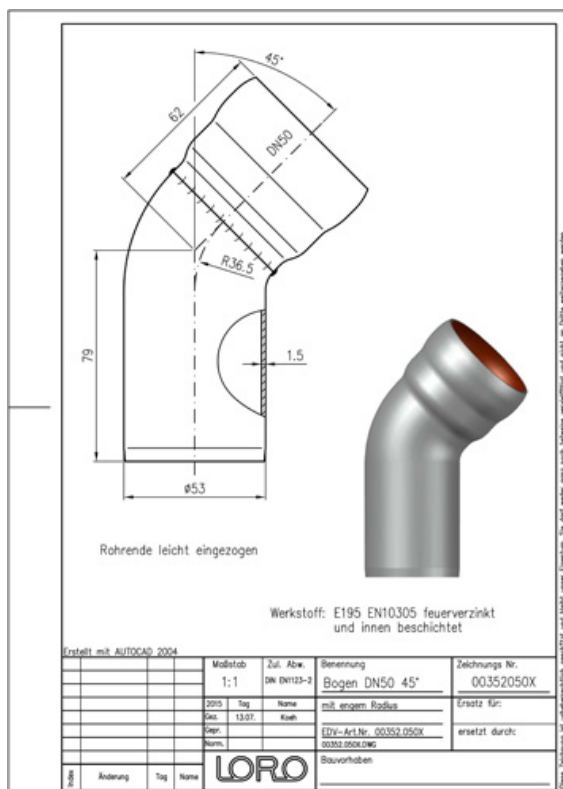

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[Certificat \(PDF\)](#)

BIM 3D (STEP)

[Desen CAD \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Brosură \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)