

LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

Popis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Údaje o artikli

EAN kód	4038088019658
ETIM trieda	EC003024
Menovitý priemer	DN 50
Menovitá dĺžka/stupeň	45
Vonkajšie rozmery (VxŠxH)	63 x 91 x 144 mm
Hmotnosť	0,30 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

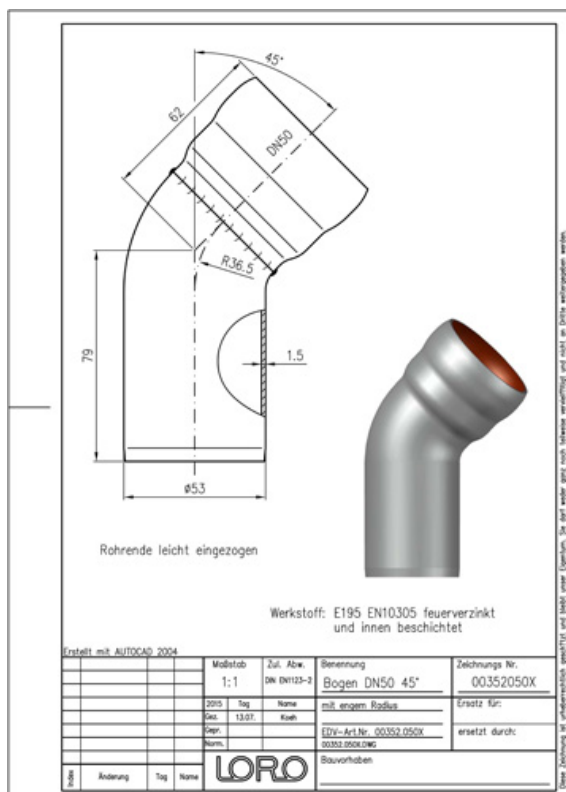

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[Certifikát \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Prospekt \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)