

## LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

### Descrição

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




### Dados do artigo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088019658               |
| Classe ETIM                | EC003024                    |
| Diâmetro nominal           | DN 50                       |
| Comprimento/grau nominal   | 45                          |
| Medidas exteriores (AxLxP) | 63 x 91 x 144 mm            |
| Peso                       | 0,30 Kg (STK)               |
| Grupo de produtos          | 1                           |
| Número de pauta aduaneira  | 73089098                    |
| Material / Cor             | Stahl feuerverzinkt, Silber |

### Nota de utilização

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

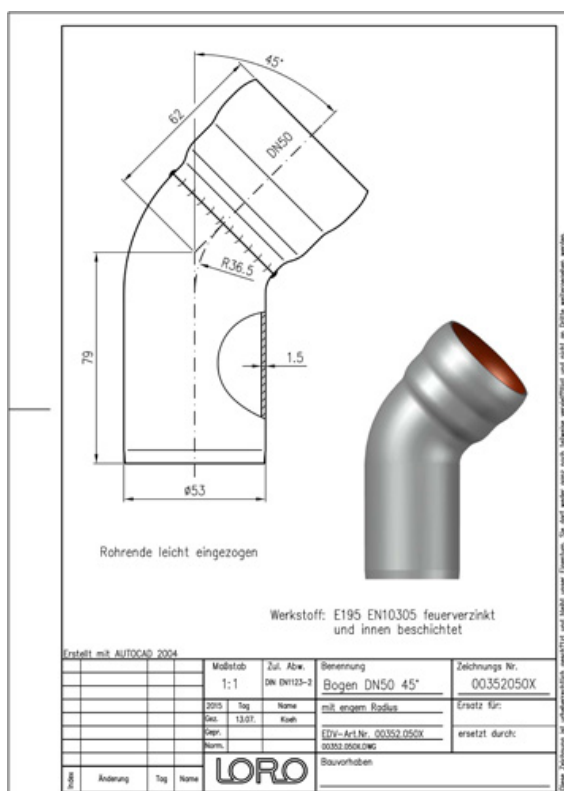

### Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[Homologação \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(paramétrico\)](#)

[Brochura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)