

LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

Opis

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Dane artykułu

Kod EAN	4038088019658
Klasa ETIM	EC003024
Średnica nominalna	DN 50
Długość/stopień nominalny	45
Wymiary zewnętrzne (WxSxD)	63 x 91 x 144 mm
Waga	0,30 Kg (STK)
Grupa produktów	1
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

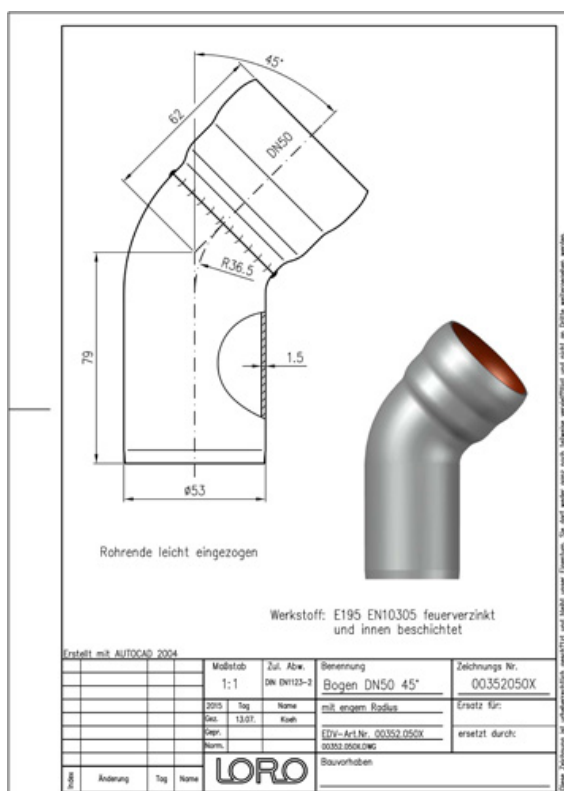

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[Certyfikat \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametryczny\)](#)

[Broszura \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)