

LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

Descrizione

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Dati articolo

Codice EAN	4038088019658
Classe ETIM	EC003024
Diametro nominale	DN 50
Lunghezza/grado nominale	45
Misure esterne (AxLxP)	63 x 91 x 144 mm
Peso	0,30 Kg (STK)
Gruppo prodotti	1
Numero tariffa doganale	73089098
Materiale / Colore	Stahl feuerverzinkt, Silber

Note d'uso

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

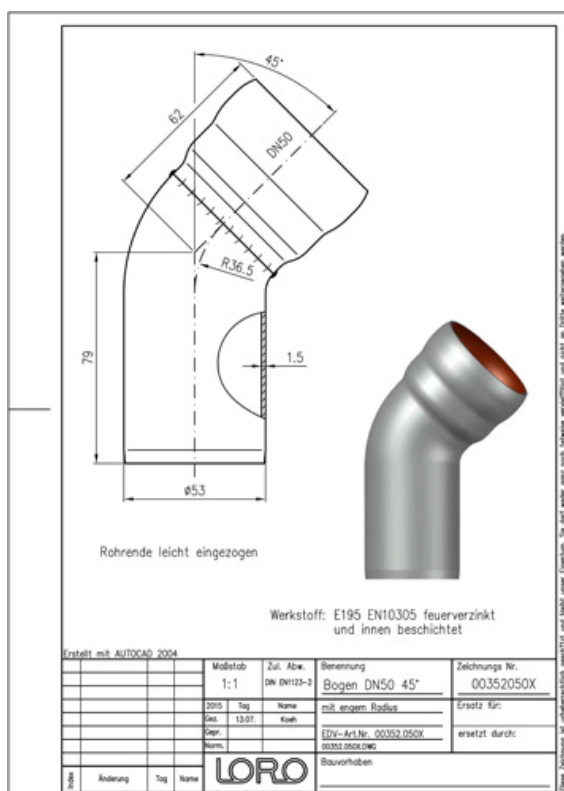

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[Certificato \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametric\)](#)

[Brochure \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)