

LORO-X SHORT RADIUS BEND 45 DEGREE DN 50

LORO-X bend with narrow radius 45 degrees DN 50

Descripción

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN50




Datos del artículo

Código EAN	4038088019658
Clase ETIM	EC003024
Diámetro nominal	DN 50
Longitud/grado nominal	45
Medidas exteriores (AxAxL)	63 x 91 x 144 mm
Peso	0,30 Kg (STK)
Grupo de productos	1
Número de arancel aduanero	73089098
Material / Color	Stahl feuerverzinkt, Silber

Nota de uso

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

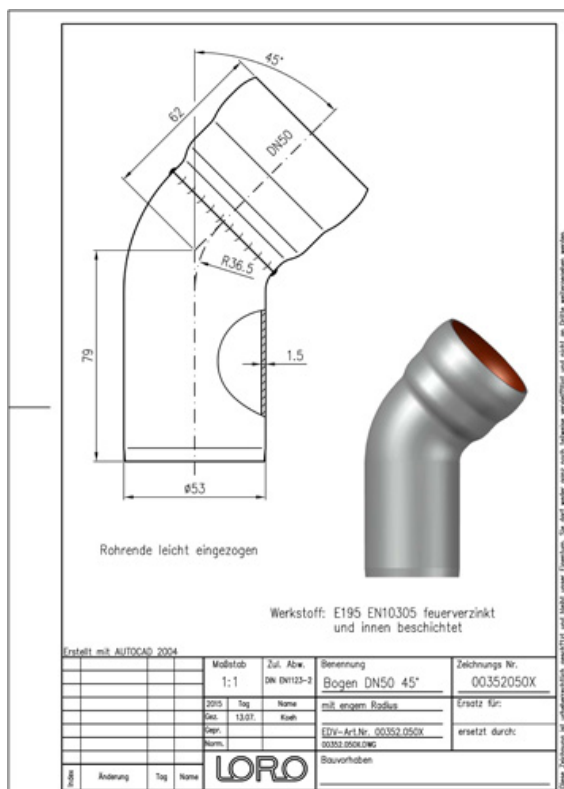

Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)

[Certificado \(PDF\)](#)

[BIM 3D \(STEP\)](#)

[Dibujo dimensional \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(paramétrisch\)](#)

[Folleto \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)