

LORO-X SHORT RADIUS BEND 45 DEGREE DN 70

LORO-X bend with narrow radius 45 degrees DN 70

Kuvaus

LORO-X bend with short radius, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, 45 degrees, DN70




Tuotetiedot

EAN-koodi	4038088019665
ETIM-luokka	EC003024
Nimellishalkaisija	DN 70
Nimellispituus/-aste	45
Ulkomitat (KxLxS)	85 x 126 x 181 mm
Paino	0,60 Kg (STK)
Tuoteryhmä	1
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Bei Verwendung von Sicherungsschellen am Spitzende des Bogens ist teilweise die Variante mit Ausklinkung zu verwenden.

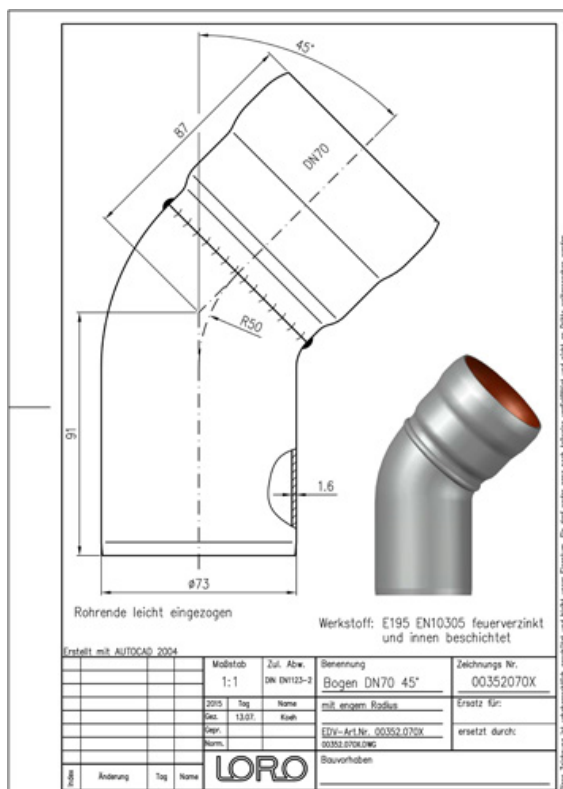

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

Hvåksyntå (PDF)

BIM 3D (STEP)

[Mittapiirustus \(PDF\)](#)

CAD 2D (DXF)

BIM IFC4 (parametrisch)

[Esite \(PDF\)](#)

CAD 3D (DWG)

BIM 3D (IFC)