


LORO-X OFFSET BEND 200 MM DN 125

LORO-X offset bend 200 mm DN 125

Popis

LORO-X offset bend made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown, offset 200 mm, DN125

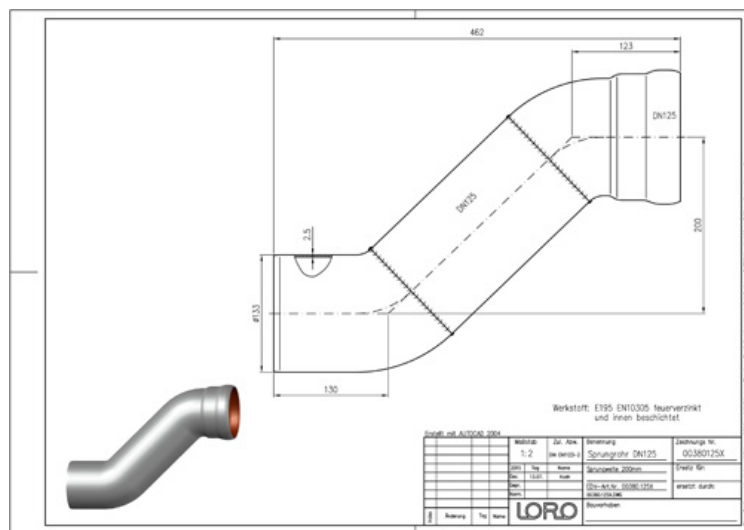

Údaje o artikli

EAN kód	4038088019863
ETIM trieda	EC003024
Menovitý priemer	DN 125
Vonkajšie rozmery (VxŠxH)	152 x 343 x 462 mm
Hmotnosť	4,90 Kg (STK)
Skupina produktov	1
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Durch den Versprung ist der Etagenbogen z.B. bei Falleitungen zur Überbrückung von Mauer- und Putzvorsprüngen bestens geeignet.

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)
[Certifikát \(PDF\)](#)
[BIM 3D \(STEP\)](#)
[Rozmerový výkres \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Prospekt \(PDF\)](#)
[CAD 3D \(DWG\)](#)